

INSTRUCTIONS FOR USE OF CABLES




# **Technical information: INSTRUCTIONS FOR USE OF CABLES**

## **HANDLING**

For loading, unloading, and handling the reels, it is necessary to use suitable equipment such as forklift trucks, pallet trucks, or cranes.

In exceptional circumstances, the reels can also be moved manually, following the instructions shown in the image below. Reels stored vertically must be straightened using appropriate means (e.g., reel tilters) before unwinding to prevent damage.

All the above operations must be carried out paying attention to the weight of the reels, the direction of unwinding of the cable, and, above all, the safety of the cable and the people involved.

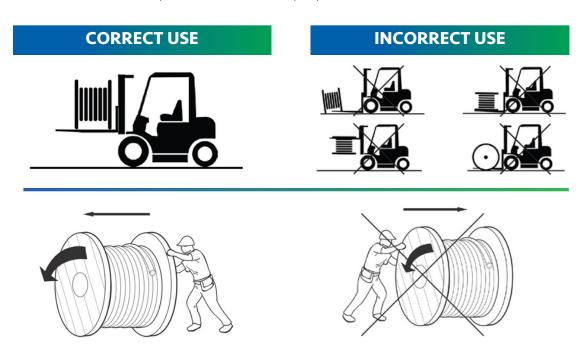




### **STORAGE**

Reels must be stored in such a way as to avoid uneven surfaces (e.g., depressions, stones, etc.) and damage to the cable by the flanges of other nearby reels.

Cables stored at a temperature lower than that recommended for installation must NOT be subjected to mechanical stress, bending, or twisting.

Cables not protected with plastic film must be stored in places not exposed to bad weather and atmospheric agents. It is advisable to protect the cable terminals to prevent moisture from entering during transport and storage.

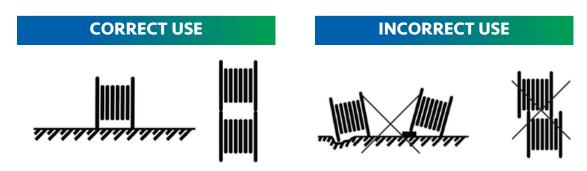




# **Technical information: INSTRUCTIONS FOR USE OF CABLES**

# **UNWINDING**

To unwind a cable from a reel or spool, follow the instructions.

When removing the polyethylene film from the cable, do not use sharp tools that could damage the outer sheath. Once the operation is complete, store any remaining cable according to the instructions provided above.

# **CORRECT USE**

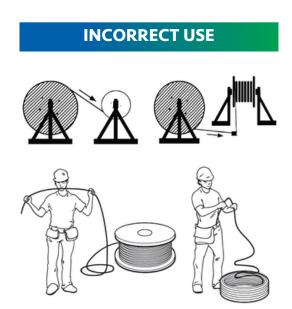



# **FIXED LAYING INSTALLATION**

IThe cable must be installed in compliance with the temperature range and minimum bending radius indicated in the technical data sheet.

During installation, direct contact between the cable and sharp edges must be avoided.

